DP WM
DP series
Wandmontage-Dimmer

16/32-Kanal-Wandmontage-Dimmerpack DP WM ist ein perfektes Gerät für den Einsatz mit **100/200W-Glühlampen**. Mit dem maximalen Gesamtstrom der Einheit von 16A und der **Phasenanschnittsteuerung über Triacs** und **Inline-Filter** ist **DP WM** ein zuverlässiger Dimmer, der für verschiedene Beleuchtungsanwendungen geeignet ist.

Es bietet auch **100% Einschaltdauer**, **konventionelle Kühlung**, **automatische Warnung bei ausgewählter Temperatur** sowie **automatische Abschaltung bei kritischen Temperaturen**.

Gehäuse, Maße & Gewicht:

Stahlgehäuse mit grauer Pulverbeschichtung

- **DP16 WM: 309 x 319 x 93mm 6,2kg**
- **DP32 WM: 560 x 319 x 93mm 7,5kg**

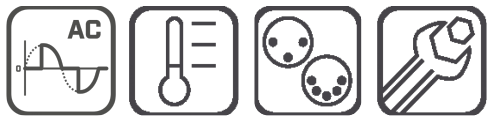

- **DMX-gesteuerter** Dimmerpack
- **16/32 unabhängige Kanäle**
- Hauptspannung: **1x 230V/16A**
- Minimale Belastung: **30W**
- Maximale Belastung: **100W**
- Eingangs-Konnektoren: **DMX XLR 3- oder 5-polig**
- Ausgang- Konnektoren: **WAGO-Klemmenkasten mit OUT, PE, N**

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com

Variants

WAGO output

- *906002* DP32-WM WAGO out
- *906001* DP16-WM WAGO out

NAC3MPB-1 output + DMX XLR in/out

- *906011* DP32-WM-NAC NAC3MPB-1 on TOP out
- *906010* DP16-WM-NAC NAC3MPB-1 on TOP out
- *906012* DP16-WM-NAC-SIDE NAC3MPB-1 on SIDE out

1PH Power Cable

UNI-Schuko Type F-1,5m

DMX connector

Screw Terminal

1PH outputs

NAC3MPB-1

WAGO

Related products

DP1

DP3



DTL16-DIN

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com