DTL16-DIN
DTL series
LED dimmer

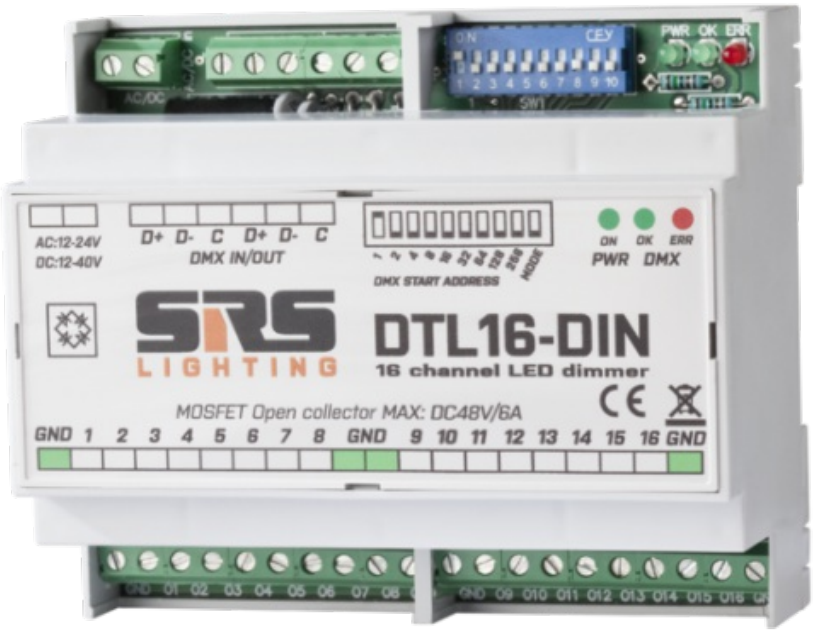

The **DTL16-DIN DMX LED driver / dimmer** is capable of controlling three **RGB channels** or sixteen **single-strip channels**. The control is done using **16 DMX channels**.

The unit is designed with installers and system integrators in mind. The dimmer features a DIN rail enclosure that allows **easy mounting**. All connections are done via **screw terminal** or optionally via detachable **screw-connectors** for a **quick replacement** of the unit.

The DMX is **optically isolated** and protected against power surges and dangerous ground loops.

- Support of **DC12-48V LED strip with DC control**
- **3x RGB control** channel or **16x single control** channel
- PWM Frequencies
- DTL16-DIN 280 Hz
- DTL16-DIN-MW TBD Hz
- **8-bit dimming resolution**
- **DMX IN / DMX THRU**
- **Over-voltage protection** of the DMX line
- **LED indication** for the DMX line

Variants

LED strip driver

- *927023* DTL16-DIN LED strip driver

Related products

DP WM



DTS16R-DIN

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com